

LED technology




IR852SO

IRIS LED 8" taxiway stopbar, straight sections (offset), high intensity lighting solutions

Applications

CAT III all weather operation airfield ground lighting (agl) systems.

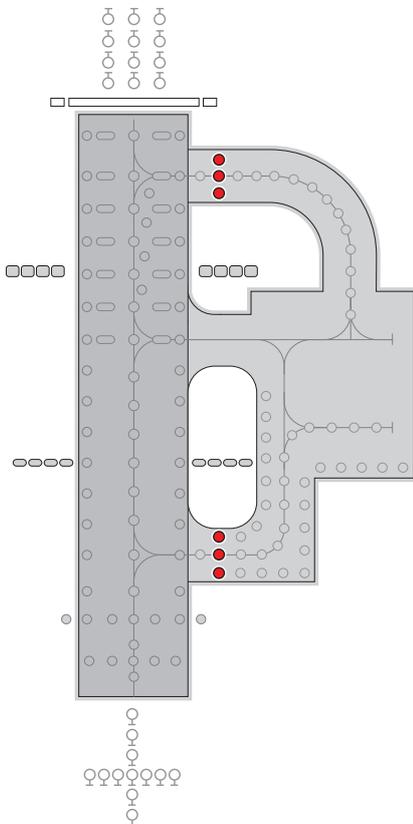

Compliant with Latest International Standards*

- ▶ ICAO Annex 14. Vol 1
- ▶ FAA AC150 5345 46†
- ▶ FAA Engineering Brief 67†
- ▶ IEC61827
- ▶ EASA Stannag 3316 (NATO)

* As applicable to the application, compliance with other civil aviation and military regulations confirmed on request

† Electrical/Mechanical/Environmental characteristics only

IR852SO IRIS LED 8" taxiway stopbar, straight sections (offset), high intensity lighting solutions



Electrical Performance

Main Beam Aperture		Colour	Typical Power Consumption - Watts (VA) @ 6.6A				
Horiz(°)	Vert(°)		Per Beam Watts	Fitting* Watts (VA)	PF	Tx Primary** Watts (VA)	PF
-10 to 10	1 to 8	RED/RED	5.34/5.34	24.74 (24.77)	0.996	35.11 (35.66)	0.985
-10 to 10	1 to 8	RED/BLK	5.34/-	14.63 (14.71)	0.991	25.00 (25.79)	0.969

Fixture Operational Current Range: 2.7 to 6.7A RMS

* as measured at the input leads of the fixture.

** as measured across the primary winding of an appropriately sized isolation transformer with a total fixture and transformer secondary length not exceeding - 1.85m (72").

Notes: For Bi-Directional twin lead option use Red/Blank electrical performance .
Isolating transformer shall be suitably sized to accommodate specific secondary and other applicable losses.
For Bi-directional twin lead option use unidirectional electrical performance for each direction.

Environmental Conditions

- ▶ Ambient Temperature -55 °C to +55°C (-67 °F to +131°F)
- ▶ Storage Temperature -55°C to +55°C (-67 °F to +131°F)
- ▶ Ingress Protection IP67

Photometry

Specification

Taxiway stopbar - straight (offset) ICAO Fig. A2-12


Colour	Red
Max/Min Intensity Ratio	<3.0
Main rect. average intensity	200 cds
Main rect. minimum intensity	100 cds
Second rect. minimum intensity	20 cds

Typical Measured Values

Taxiway stopbar - straight (offset) ICAO Fig. A2-12

Colour	Red
Max/Min Intensity Ratio	2.3
Main rect. average intensity	452 cds
Main rect. maximum intensity (A)	563 cds
Main rect. minimum intensity (B)	245 cds
Second rect. minimum intensity	115 cds

Intensity Chart - IRIS Stopbar (Straight/Offset)

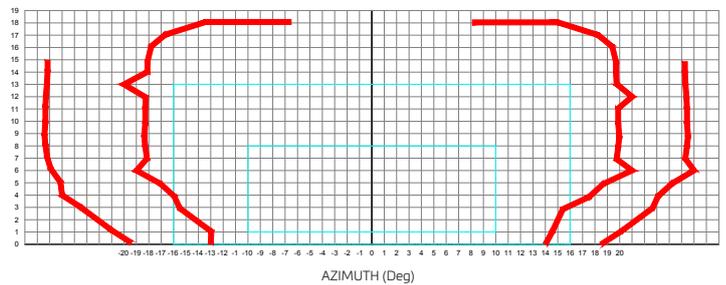

IR852SO

IRIS LED 8" taxiway stopbar, straight sections (offset), high intensity lighting solutions



Ordering Codes:



Application
L-852SO(L) Stopbar - Straight (offset)

Beam Type
A Side
 6 = Straight (Offset)
 0 = Blank

B Side
 6 = Straight (Offset)
 0 = Blank

Colour
A Side
 R = Red
 N = Not Applicable




B Side
 R = Red
 N = Not Applicable

Specification
1 = ICAO

Connections
 1 = 1 Plug Bi Pin
 2 = 2 Plug Bi Pin

Fixture Monitoring - Fail Open Feature
 0 = No Open Circuit
 1 = Open Circuit


Beam Options

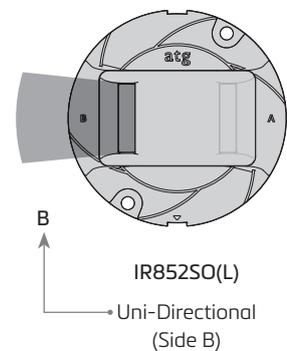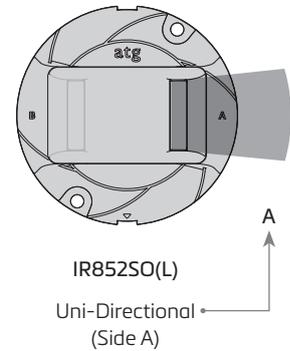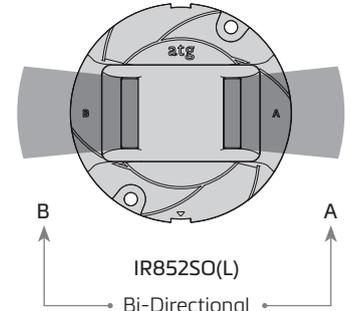

Additional optional features are available upon request

IR852SO IRIS LED 8" taxiway stopbar, straight sections (offset), high intensity lighting solutions

Dimensions

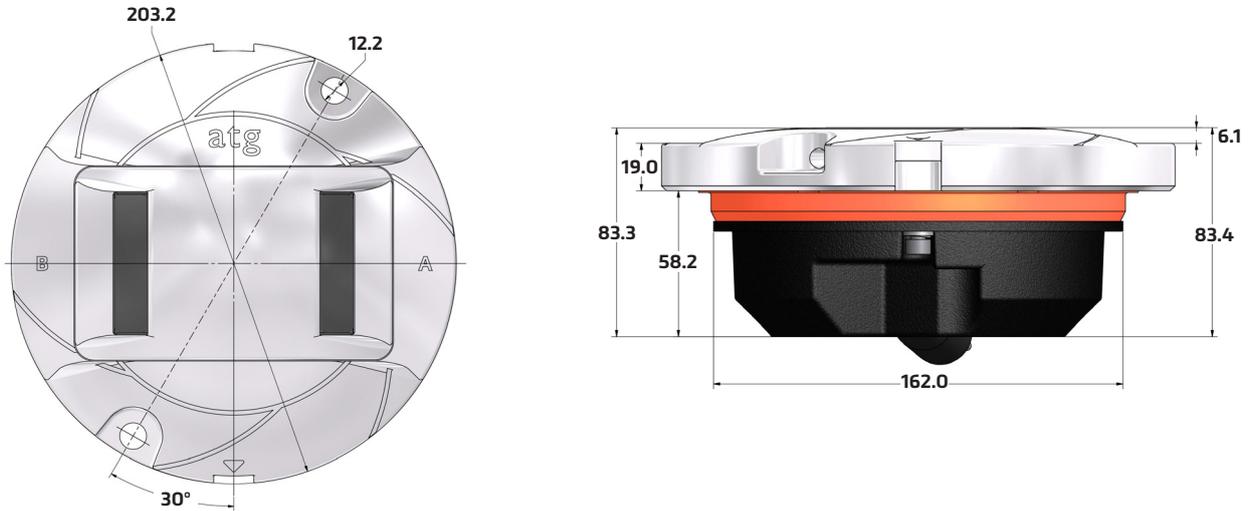


Packaging

- ▶ Net weight 3.12Kg
- ▶ Gross weight 3.52 (boxed)
- ▶ Box 260mm (L) x 260mm (W) x 175mm (H)

*Dimensions are nominal

Consultants specification and installation information for the Iris range is available by request. Contact marketing@atgairports for further details.

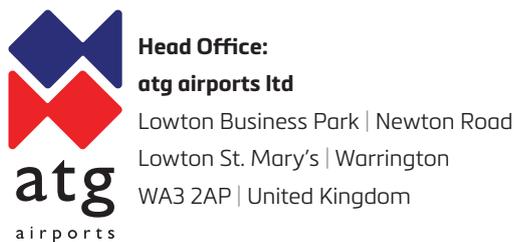

atg airports reserve the right to change technical data and details at any point in time. Errors may have occurred

UK: +44 (0) 1942 68 5555 | USA: 001 (239) 985-9406

www.atgairports.com | enquiries@atgairports.com | sales-usa@atgairports.com

IRIS LED AGL
L-852SO