

FX852D

Taxiway centreline
Curved sections
Wide beam
High intensity
lighting solutions

Compliant to Latest International Standards*

- ▶ ICAO Annex 14. Vol 1
- ▶ FAA AC 150/5345-46
- ▶ FAA Engineering Brief No.67
- ▶ IEC 61827
- ▶ EASA
- ▶ Stannag 3316 (NATO)

Applications

CAT II/III all weather operation airfield ground
lighting systems.

* As applicable to the application, compliance with other civil aviation and
military regulations confirmed on request

† Electrical/Mechanical/Environmental characteristics only

FX852D

LED Inset Taxiway centreline (Wide)
High intensity lighting solutions



Electrical Performance

Main Beam Aperture		Colour	Typical Power Consumption - Watts (VA) @ 6.6A				
Horiz(°)	Vert(°)		Per Beam Watts nominal	Fitting* Watts (VA)	PF	Tx Primary** Watts (VA)	PF
-3.5 to +3.5	1 to 8	GRN/GRN	9.35/9.35	30.92 (31.02)	0.998	40.12 (40.66)	0.987
-3.5 to +3.5	1 to 8	YEL/YEL	10.45/10.45	33.32 (33.40)	0.998	42.28 (42.82)	0.988
-3.5 to +3.5	1 to 8	GRN/YEL	9.35/10.45	32.43 (32.52)	0.998	41.50 (42.00)	0.988
-3.5 to +3.5	1 to 8	GRN/BLK	9.35/-	16.77 (16.79)	0.998	25.82 (26.38)	0.979
-3.5 to +3.5	1 to 8	YEL/BLK	10.45/-	17.98 (18.01)	0.998	27.11 (27.63)	0.981

Fixture Operational Current Range: 2.8 to 6.7A RMS

* as measured at the input leads of the fixture.

** as measured across the primary winding of an appropriately sized isolation transformer with a total fixture and transformer secondary length not exceeding - 1.85m (72").

*** electrical characteristics measured with 45 watt transformer, fitting can operate from transformers up to 210 watts.

Note: Isolating transformer shall be suitably sized to accommodate specific secondary and other applicable losses.

Photometry

Specification

Taxiway Centre Line Straight (Wide) - FAA L-852D

Colour	Green
Max/Min Intensity Ratio	<3.0
Main rect. average intensity	100 cds
Main rect. minimum intensity	50 cds
Second rect. minimum intensity	10 cds

Typical Measured Values

Colour	Green
Max/Min Intensity Ratio (Ref)	<3.0
Main rect. average intensity	156 cds
Main rect. minimum intensity	57 cds
Second rect. minimum intensity	43 cds


Specification

Colour	Yellow
Max/Min Intensity Ratio	<3.0
Main rect. average intensity	100 cds
Main rect. minimum intensity	50 cds
Second rect. minimum intensity	10 cds


Typical Measured Values

Colour	Yellow
Max/Min Intensity Ratio (Ref)	2.63
Main rect. average intensity	199 cds
Main rect. maximum intensity (A)	260 cds
Main rect. minimum intensity (B)	83 cds
Second rect. minimum intensity	57 cds

Intensity Chart - Taxiway Centreline Luminaire (straight wide) Green

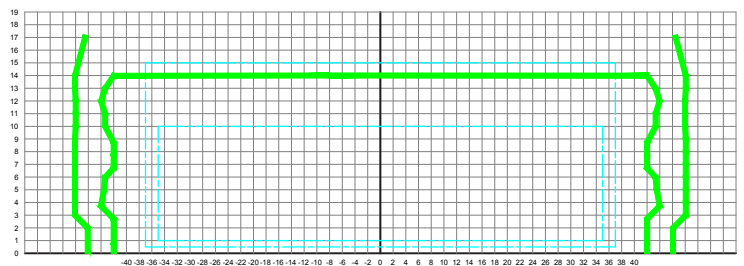

Intensity Chart - Taxiway Centreline Luminaire (straight wide) Yellow

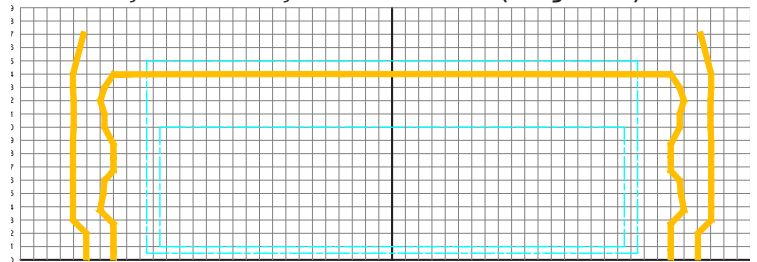

FX852D

LED Inset Taxiway centreline (Wide)
High intensity lighting solutions



Features

Low energy consumption compared with the tungsten halogen equivalent.

Greatly reduced maintenance: calculated MTBF of 75,000 hours at 6.6A.

Operates on the full range of 2.8A to 6.6A on either 3 or 5 step IGBT, ferroresonant or thyristor CCRs that are designed in compliance with IEC or FAA requirements.

Fully dimmable lights, replicating the response curve of traditional halogen lights.

Full compatibility with existing airfield lighting series circuits. Installation on same mounting device as most conventional lights, for a straightforward replacement.


Monitoring function of the individual light arrays for open circuit, short circuit, and over temperature. The LED light automatically disconnects from the secondary side of the isolation transformer, resulting in an open circuit condition.

Low operating temperature, ensuring longer component life.

FAA style 3, ICAO style 4 fixture with a 3.5 mm profile above gradient

L-823 connectors

Integral surge protection

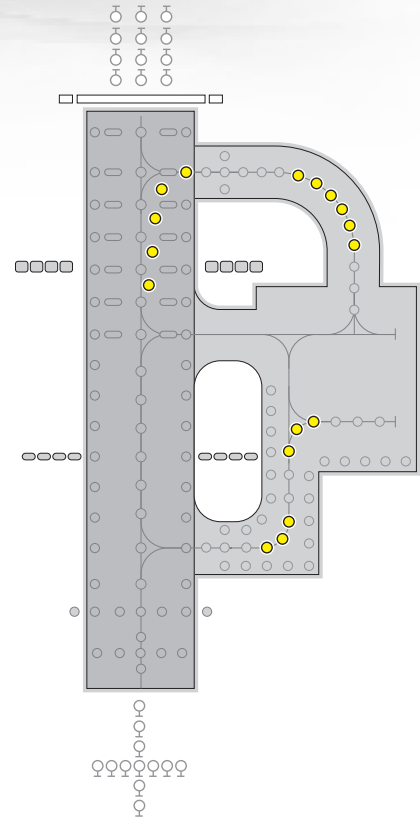

Environmental Conditions

▶ Ambient Temperature -55 °C to +55°C (-67 °F to +131°F)

▶ Storage Temperature -55°C to +70°C (-67 °F to +158°F)

▶ Atmospheric Altitude up to 10,000 feet (3000m)

▶ Relative Humidity 0-100% (sealed unit)

Standards	
EMC protection	Immunity IEC 61000-4 Emission IEC 61000-2
Ingress protection class dust/liquids	IP68 (IEC69598-1)
Vibration resistance	IEC60068-2-6

UK: +44 (0) 1942 68 5555 | USA: +1 (239) 985-9406

www.atgairports.com | enquiries@atgairports.com | sales-usa@atgairports.com

L-852D(L)

FX852D

LED Inset Taxiway centreline (Wide)
High intensity lighting solutions



Ordering Codes:



Application
L-852D(L) Taxiway Centreline
Curve (wide)




Beam Type
A Side
5 = Straight (wide)
0 = Blank
.....
B Side
4 = Straight (wide)
0 = Blank

Colour
A Side
G = Green
Y = Yellow
C = Cyan/Green
N = Not applicable
.....
B Side
G = Green
Y = Yellow
C = Cyan/Green
N = Not applicable

Specification
1 = FAA
2 = ICAO

Connections
1 = 1 x Bi-pin plug
2 = 2 x Bi-pin plug


Beam Options

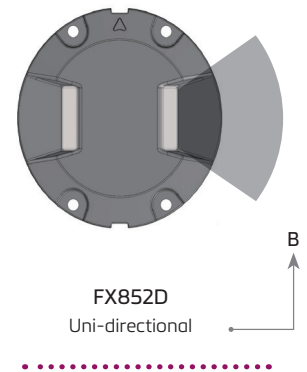

Additional optional features may be available upon request

FX852D LED Inset Taxiway centreline (Wide) High intensity lighting solutions

Dimensions

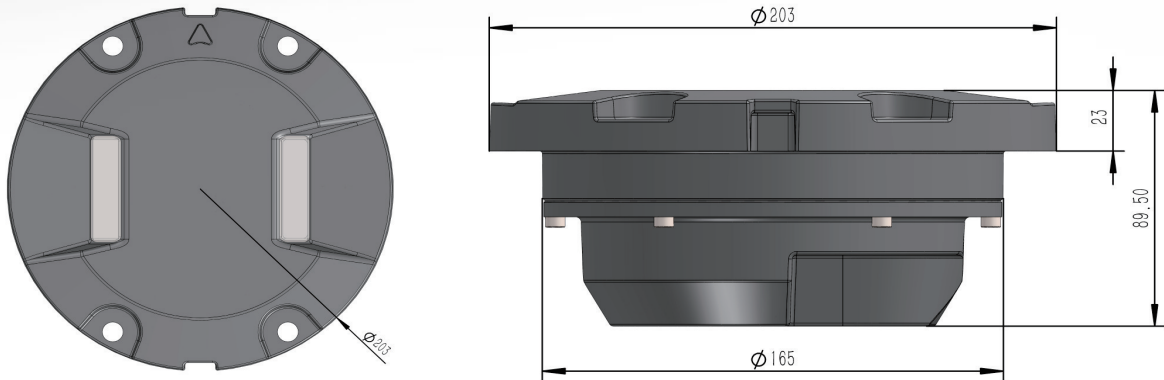

Packaging

- ▶ Net weight 2.5Kg
- ▶ Gross weight 2.9 (boxed)
- ▶ Box 220mm (L) x 220mm (W) x 225mm (H)

weights and dimensions are nominal



Head Office:

atg airports ltd

Lowton Business Park | Newton Road

Lowton St. Mary's | Warrington

WA3 2AP | United Kingdom

atg airports reserve the right to change technical data and details at any point in time. Errors may have occurred



☎ UK: +44 (0) 1942 68 5555 | USA: +1 (239) 985-9406

🌐 www.atgairports.com ✉ enquiries@atgairports.com ✉ sales-usa@atgairports.com

Rev 1 - 2019

L-852D(L)