



FX862C

Runway Edge
Elevated LED fixture
High intensity
lighting solutions

Compliant to Latest International Standards*

- ▶ ICAO Annex 14. Vol 1
- ▶ FAA AC 150/5345-46
- ▶ FAA Engineering Brief No.67
- ▶ IEC 61827
- ▶ EASA
- ▶ Stannag 3316 (NATO)

Applications

CAT I/II/III all weather operation airfield ground
lighting (agl) systems.

* As applicable to the application, compliance with other civil aviation and
military regulations confirmed on request

† Electrical/Mechanical/Environmental characteristics only

Electrical Performance

Main Beam Aperture		Colour	Typical Power Consumption - Watts (VA) @ 6.6A				
Horiz(°)	Vert(°)		Per Beam Watts nominal	Fitting* Watts (VA) PF	Tx Primary** Watts (VA) PF		
-2 to +9	0 to 7	WHT/WHT	39.7/39.7	119 (119.6) 0.99	154.8 (155.8) 0.99		
-2 to +9	0 to 7	WHT/YEL	39.7/16.2	88.3 (88.7) 0.99	123.9 (125.4) 0.98		
-2 to +9	0 to 7	WHT/RED	39.7/12.5	85.7 (86.0) 0.99	120.8 (122.7) 0.98		
-2 to +9	0 to 7	YEL/RED	16.2/12.5	55.0 (55.1) 0.99	89.9 (92.1) 0.98		

Fixture Operational Current Range: 2.8 to 6.7A RMS

* as measured at the input leads of the fixture.

** as measured across the primary winding of an appropriately sized isolation transformer with a total fixture and transformer secondary length not exceeding ~ 1.85m (72").

*** electrical characteristics measured with 45 watt transformer, fitting can operate from transformers up to 210 watts.

Note: Isolating transformer shall be suitably sized to accommodate specific secondary and other applicable losses.

Photometry

Specification

Colour	White
Max/Min Intensity ratio	<3.0
Main ellipse average intensity	1000cds
Main ellipse minimum intensity	500cds
Second ellipse minimum intensity	100cds
Third ellipse minimum intensity	50cds

Typical Measured Values

Colour	White
Max/Min Intensity ratio	2.43
Main ellipse average intensity	10938cds
Main ellipse minimum intensity	6358cds
Second ellipse minimum intensity	3437cds
Third ellipse minimum intensity	1793cds

Specification

Colour	Yellow
Max/Min Intensity ratio	<3.0
Main ellipse minimum intensity	200cds
Second ellipse minimum intensity	40cds
Third ellipse minimum intensity	20cds

Typical Measured Values

Colour	Yellow
Max/Min Intensity ratio	2.57
Main ellipse average intensity	5160cds
Main ellipse minimum intensity	2741cds
Second ellipse minimum intensity	1378cds
Third ellipse minimum intensity	880cds


Specification

Colour	Red
Max/Min Intensity ratio	<3.0
Main ellipse average intensity	1500cds
Main ellipse minimum intensity	750cds
Second ellipse minimum intensity	150cds
Third ellipse minimum intensity	75cds


Typical Measured Values

Colour	Red
Max/Min Intensity ratio	2.27
Main ellipse average intensity	2122cds
Main ellipse minimum intensity	1285cds
Second ellipse minimum intensity	764cds
Third ellipse minimum intensity	465cds


Intensity Chart - Elevated Runway Edge Luminaire - White

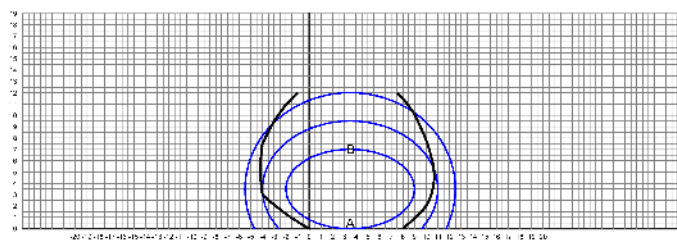

Intensity Chart - Elevated Runway Edge Luminaire - Yellow

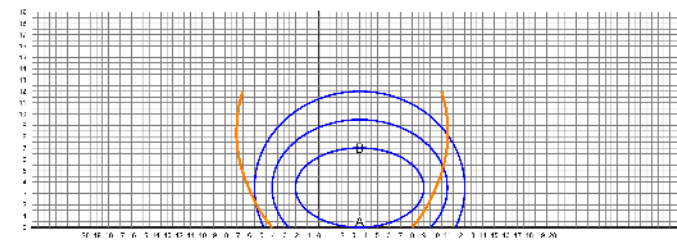

Intensity Chart - Elevated Runway Edge Luminaire - Red

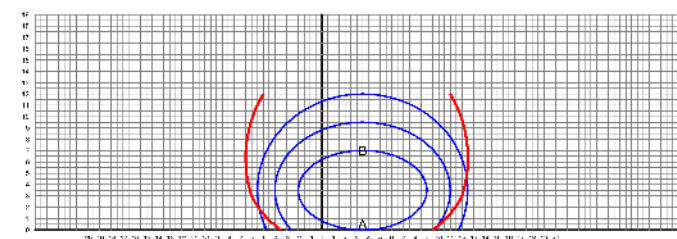


FX862C

LED Elevated Runway Edge
High intensity lighting solutions



Features

- Low energy consumption compared with the tungsten halogen equivalent.
- Greatly reduced maintenance: Estimated lamp life of 75,000 hours at 6.6A.
- Operates on the full range of 2.8A to 6.6A on either 3 or 5 step IGBT, ferroresonant or thyristor CCRs that are designed in compliance with IEC or FAA requirements. Fully dimmable lights, replicating the response curve of traditional halogen lights.
- Omnidirectional beam for circular guidance is available for bidirectional runway Edge fixture
- No need to replace the CCRs, series transformers, or cables. Full compatibility with existing airfield lighting series circuits. Installation on same mounting device as most conventional lights, for a straightforward replacement.
- Monitoring function of the individual light source. In case of a defect, the LED light automatically disconnects from the secondary side of the isolation transformer, resulting in an open circuit condition.
- Low operating temperature, ensuring longer component life.
- FAA L-823 connector
- Sealed cable entry to main assembly interface preventing insect and water ingress.
- powder coating, aviation yellow colour
- Integral surge protection

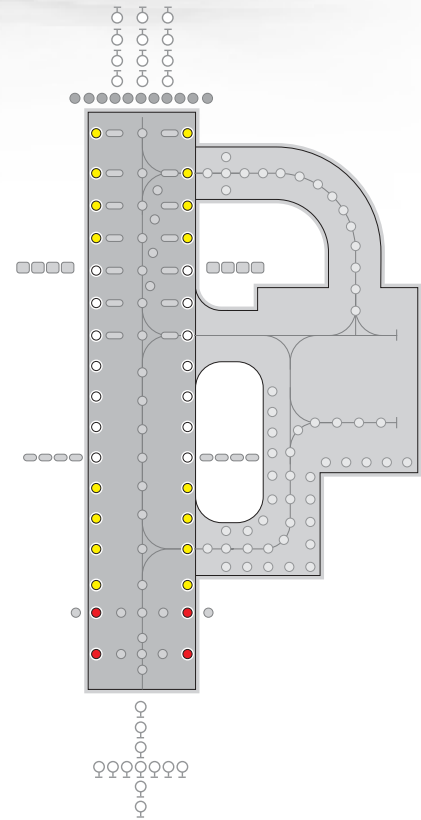

Environmental Conditions

- ▶ Ambient Temperature -55 °C to +55°C (-67 °F to +131°F)
- ▶ Storage Temperature -55°C to +70°C (-67 °F to +158°F)
- ▶ Atmospheric Altitude up to 10,000 feet (3000m)
- ▶ Relative Humidity 0-100% (sealed unit)

Standards	
EMC protection	Immunity IEC 61000-4 Emission IEC 61000-2
Ingress protection class dust/liquids	IP67 (IEC69598-1)
Vibration resistance	IEC60068-2-6

UK: +44 (0) 1942 68 5555 | USA: +1 (239) 985-9406

FX862C

www.atgairports.com | enquiries@atgairports.com | sales-usa@atgairports.com

FX862C

Elevated Runway Edge
High intensity lighting solutions



Ordering Codes:



Application
L-862C (L) Runway Edge

Beam Type
A Side
 3 = Toe in right
 0 = Blank

B Side
 2 = Toe in left
 0 = Blank




Colour
A Side
 W = White R = Red
 Y = Yellow O = Blank

B Side
 W = White R = Red
 Y = Yellow O = Blank

Specification
 1 = FAA
 2 = ICAO

Omni Directional Component
 0 = No omni directional optic
 1 = Omni directional optic fitted

Beam Options

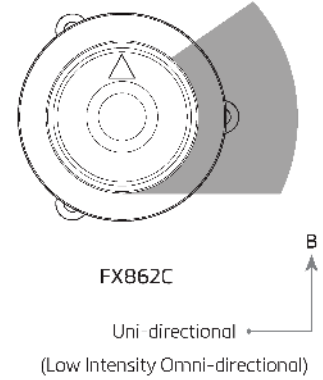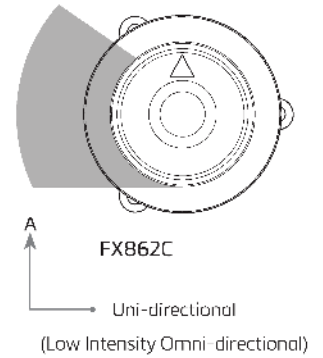

Additional optional features are available upon request

UK: +44 (0) 1942 68 5555 | USA: +1 (239) 985-9406


FX862C

www.atgairports.com enquiries@atgairports.com sales-usa@atgairports.com

FX862C

Elevated Runway Edge
High intensity lighting solutions

Dimensions

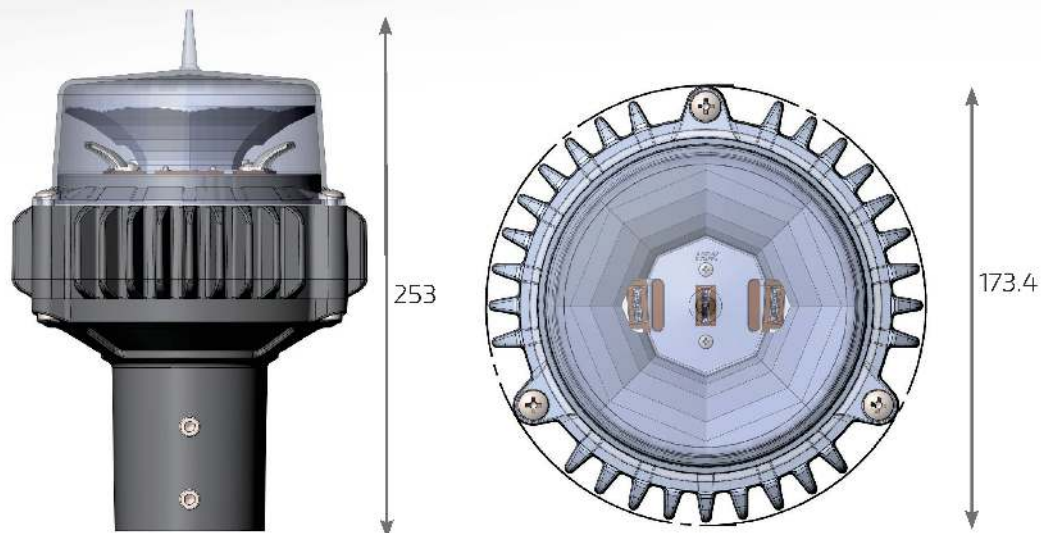

Packaging

- ▶ Net weight 3.0Kg
- ▶ Gross weight 3.3 (boxed)
- ▶ Box 350mm (L) x 218mm (W) x 216mm (H)



Head Office:

atg airports Ltd

Lowton Business Park | Newton Road

Lowton St. Mary's | Warrington

WA3 2AP | United Kingdom

atg airports reserve the right to change technical data and details at any point in time. Errors may have occurred



☎ UK: +44 (0) 1942 68 5555 | USA: +1 (239) 985-9406

🌐 www.atgairports.com ✉ enquiries@atgairports.com ✉ sales-usa@atgairports.com

FX862C