


Heliport & Helipad Lighting

Floodlight Helipad Lighting System



Application

- ▶ The Surface Floodlights are designed to satisfy all the ICAO required performances:
 - > they will provide the correct Touchdown and Lift-Off area illumination, as alternative or as integration of the perimeter lights, with a minimum of 10 cd/m²,
 - > the maximum height is 13cm, less than the required 25cm, to increase safety during hovering/ final approach operations,
 - > the two pivoting lamp holders provides the correct illuminations in any installation, aside from helipad shape and light positioning
 - > defenses on the lamp prevent the pilot from dazzling or direct light
- ▶ The floodlights are normally installed along the perimeter of the Touchdown and Lift-Off area. They can be fixed on a special base by means of screws or bolts, or directly to the ground and must be carefully oriented, in order to achieve the most effective spreading of the light.

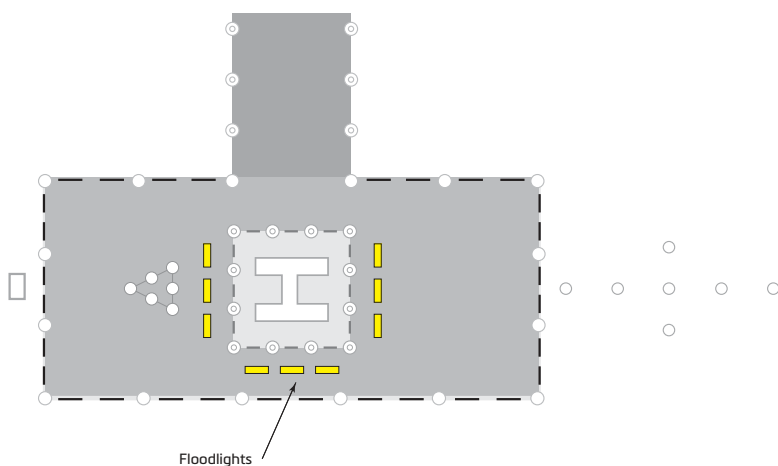


Heliport Series | Floodlight Helipad Lighting System



Technical Data	
Body material	Powder coated aluminium
Body colour	Yellow aviation (RAL 1004)
Total power	20W
Power supply	Standard: 230V AC
Driver	Included, inside body case
Disperser	Transparent polycarbonate
LEDs power	2,5W

Dimensions

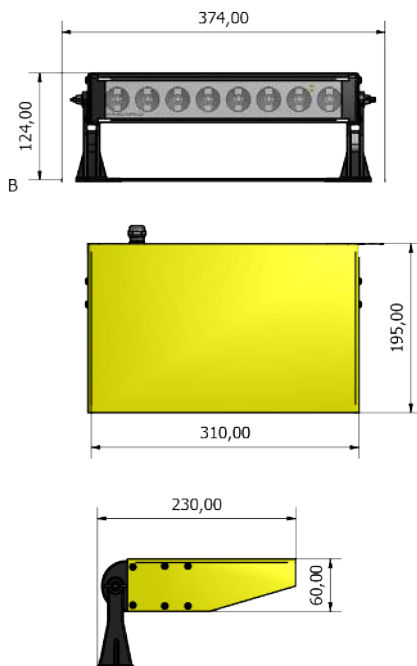

Drawings and details here are for indicative purposes only



Head Office:
atg airports ltd
 Lowton Business Park | Newton Road
 Lowton St. Mary's | Warrington
 WA3 2AP | United Kingdom

Compliant with latest International standards

- ▶ ICAO Aerodromes, Annex 14 Aerodrome Design and Operations
- ▶ DIRECTIVE 2002/95/EC:2003 Restriction of the use of certain hazardous substances in electrical and electronic equipment (RoHS)

Light source characteristics

- ▶ LFixture Luminous efficiency: 120lm/W
- ▶ High power OSRAM LEDs
- ▶ Specially designed lenses
- ▶ Period of use of LEDs is minimum 50000 hours
- ▶ Light color: White - according to CIE Chromaticity Boundary


Technical characteristics

- ▶ The casing is made out of aluminum powder coated in electrostatic field
- ▶ All the external assembly elements are made of polycarbonate
- ▶ The disperser is made of transparent 3 mm polycarbonate, UV protected
- ▶ The degree of protection IP66
- ▶ The orientation system is hinge type which can be orientated to the desired angle
- ▶ The fitting is bolted on any flat surface
- ▶ Nominal operating temperature from -40 to +50 °C

Electrical characteristics

- ▶ Standard power supply is 230 V, 50/60 Hz
- ▶ Power cable length 2 m
- ▶ Electrical insulation resistance: I

Photometrics

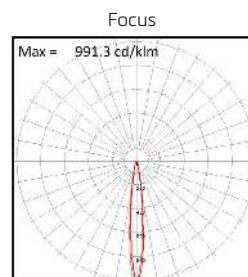

THINK BEFORE YOU PRINT



atg airports reserve the right to change technical data and details at any point in time. Errors may have occurred

UK: +44 (0) 1942 68 5555 | USA: 001 (239) 985-9406

www.atgairports.com | enquiries@atgairports.com | sales-usa@atgairports.com

Heliport Lighting
Floodlight