


LED technology



IR852T

LED 8" taxiway and apron edge, omni directional, high intensity lighting solutions

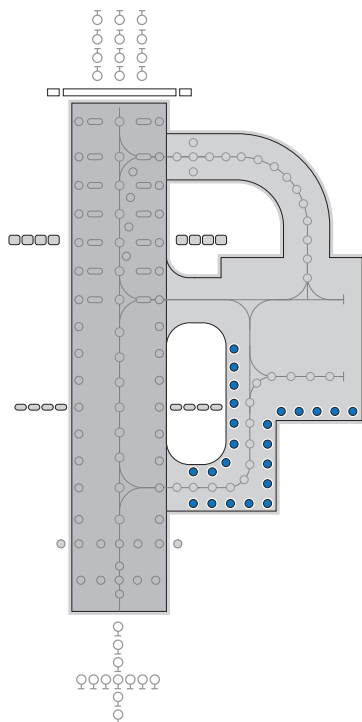

Applications

CAT I/II/III all weather operation airfield ground lighting (agl) systems.

Compliant with Latest International Standards*

- ▶ ICAO Annex 14. Vol 1
- ▶ FAA AC 150/5345-46
- ▶ FAA Engineering Brief No. 67
- ▶ IEC 61827
- ▶ EASA
- ▶ Stannag 3316 (NATO)

* As applicable to the application, compliance with other civil aviation and military regulations confirmed on request

IR852T LED 8" taxiway and apron edge, omni directional, high intensity lighting solutions



Electrical Performance

Main Beam Aperture		Colour	Typical Power Consumption - Watts (VA) @ 6.6A					
Horiz(°)	Vert(°)		Per Beam Watts	Fitting* Watts (VA)	PF	Tx Primary** Watts (VA)	PF	Isolating Transformer
0-359	0-6	Blue	0.75	4.71(4.74)	0.993	12.87(13.01)	0.991	10W
0-359	0-6	Blue	0.75	4.67(4.70)	0.993	13.76(14.09)	0.977	25W
0-359	0-6	Blue	0.75	4.64(4.66)	0.994	16.23(17.16)	0.948	45W

Fixture Operational Current Range: 2.7 to 6.7A RMS

Notes: Isolating transformer shall be suitably sized to accommodate specific secondary and other applicable losses.

* as measured at the input leads of the fixture.

** as measured across the primary winding of an appropriately sized isolation transformer with a total fixture and transformer secondary length not exceeding - 1.85m (72"). CCR shall be suitably sized for the indicated transformer VA for the relevant isolating transformer utilised.

*** main beam vertical requirements for FAA is 1° to 6° for IR852T

Environmental Conditions

- ▶ Ambient Temperature -55 °C to +55°C (-67 °F to +131°F)
- ▶ Storage Temperature -55°C to +55°C (-67 °F to +131°F)

▶ Ingress Protection IP67

Photometry


Specification

Taxiway & Apron Edge omni-directional ICAO - 5.3.18.7/8 FAA L-852T

Colour	Blue
Main rect. minimum intensity 0°-6°	2 cd
Second rect. minimum intensity 6°-90°	0.2 cd

Typical Measured Values

Colour	Blue
Main rect. minimum intensity 0°-6°	3.0 cd
Main rect. minimum intensity 0°-8° (Stannag)	2.9 cd
Second rect. minimum intensity 6°-90°	1.0 cd

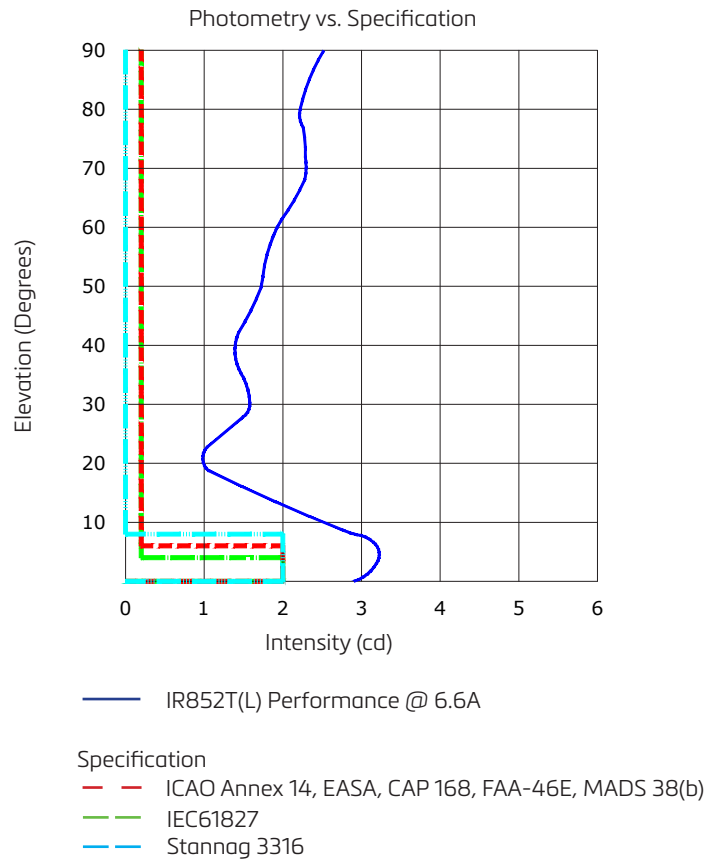

UK: +44 (0) 1942 68 5555 | USA: 001 (239) 985-9406


www.atgairports.com enquiries@atgairports.com sales-usa@atgairports.com

LED AGL
IR852T

IR852T LED 8" taxiway and apron edge, omni directional, high intensity lighting solutions




Ordering Codes IR852

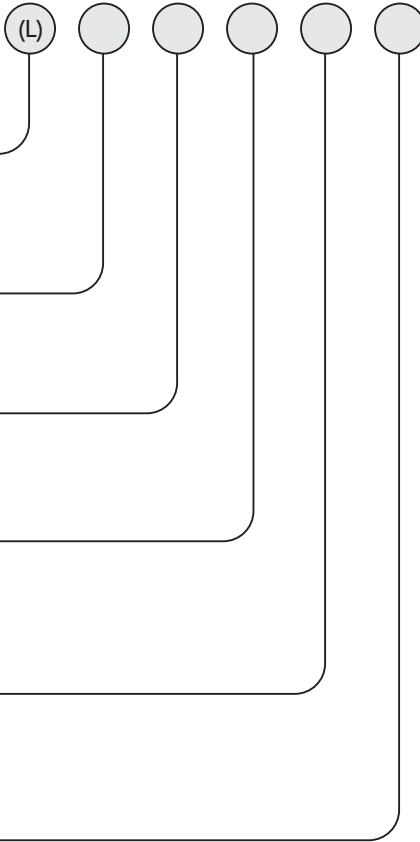


- Application**
L-852T(L) Taxiway & Apron Edge
omni-directional
- Beam Type**
7 = Omni directional (360°)
- Colour**
B = Blue
- Optional Shield**
1 = 180° Shield
0 = No Shield
- Specification**
1 = FAA
2 = ICAO
- Fixture Monitoring - Fail Open Feature**
0 = No Open Circuit
1 = Open Circuit

Beam Options



IR852T(L)
Omni Directional 360°




IR852T(L)
Omni Directional
with 180° Shield

* Other seating/mounting configurations are available on request.

IR852T LED 8" taxiway and apron edge, omni directional, high intensity lighting solutions



Dimensions

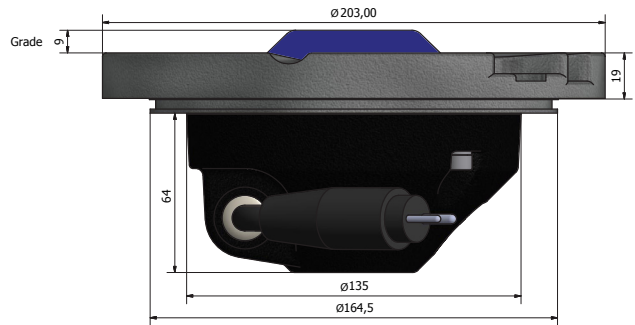

Packaging

▶ Net weight 3kg ▶ Gross weight 3.5kg ▶ Box 230mm(w) x 230mm(d) x 146mm(h)

*Dimensions are nominal



Head Office:
atg airports ltd
Lowton Business Park | Newton Road
Lowton St. Mary's | Warrington
WA3 2AP | United Kingdom

**THINK
BEFORE YOU
PRINT**



atg airports reserve the right to change technical data and details at any point in time. Errors may have occurred

UK: +44 (0) 1942 68 5555 | USA: 001 (239) 985-9406

www.atgairports.com enquiries@atgairports.com sales-usa@atgairports.com

LED AGL
IR852T