

FX850B

Runway
Touch Down Zone
High intensity
lighting solutions

Compliant to Latest International Standards*

- ▶ ICAO Annex 14. Vol 1
- ▶ FAA AC 150/5345-46
- ▶ FAA Engineering Brief No.67
- ▶ TP312
- ▶ MOS139
- ▶ IEC 61827
- ▶ EASA
- ▶ Stannag 3316 (NATO)

Applications

CAT I/II/III all weather operation airfield ground
lighting (agl) systems.

* As applicable to the application, compliance with other civil aviation and
military regulations confirmed on request

† Electrical/Mechanical/Environmental characteristics only

FX850B

LED Inset runway touch down zone
High intensity lighting solutions



Electrical Performance

Main Beam Aperture		Colour	Typical Power Consumption - Watts (VA) @ 6.6A				
Horiz(°)	Vert(°)		Per Beam Watts nominal	Fitting* Watts (VA)	PF	Tx Primary** Watts (VA)	PF
-5 to +5	2 to 9	WHT/BLK	20.0/----	27.76 (27.93)	0.993	37.91 (38.85)	0.976
-1 to +9	2 to 9	BLK/WHT	----/20.0	27.76 (27.93)	0.993	37.91 (38.85)	0.976

Fixture Operational Current Range: 2.8 to 6.7A RMS

* as measured at the input leads of the fixture.

** as measured across the primary winding of an appropriately sized isolation transformer with a total fixture and transformer secondary length not exceeding - 1.85m (72").

*** electrical characteristics measured with 45 watt transformer, fitting can operate from transformers up to 210 watts.

Note: Isolating transformer shall be suitably sized to accommodate specific secondary and other applicable losses.

Photometry


Specification Touch Down Zone ICAO Fig A2-5 FAA L-850B

Colour	White
Max/Min Intensity Ratio	<3.0
Main ellipse average intensity	5000 cds
Main ellipse minimum intensity	2500 cds
Second ellipse minimum intensity	1000 cds
Third ellipse minimum intensity	500 cds


Typical Measured Values

Colour	White
Max/Min Intensity Ratio	1.9
Main ellipse average intensity	5700 cds
Main ellipse maximum intensity	7200 cds
Main ellipse minimum intensity	3900 cds
Second ellipse minimum intensity	2900 cds
Third ellipse minimum intensity	1900 cds


Intensity Chart - Touch Down Zone Luminaire - (toe-in right) White

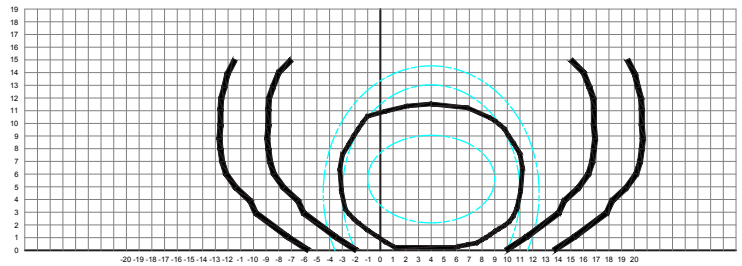

Intensity Chart - Touch Down Zone Luminaire - (toe-in left) White

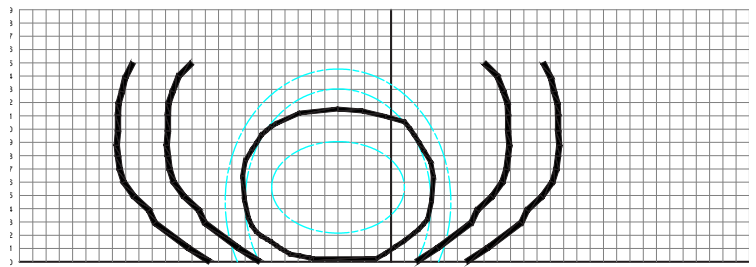

Intensity Chart - Touch Down Zone Luminaire - (straight axial) White

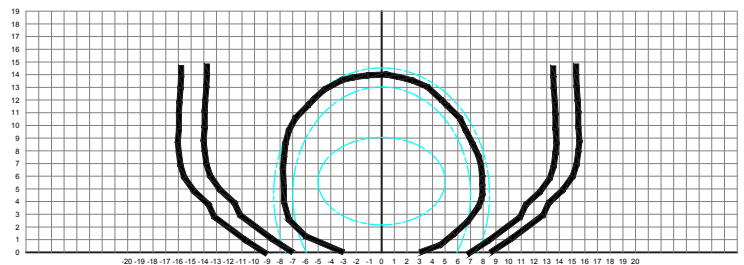

UK: +44 (0) 1942 68 5555 | USA: +1 (239) 985-9406

www.atgairports.com enquiries@atgairports.com sales-usa@atgairports.com

L-850B(L)

FX850B

LED Inset runway touch down zone
High intensity lighting solutions



Features

Low energy consumption compared with the tungsten halogen equivalent.

Greatly reduced maintenance: calculated MTBF of 75,000 hours at 6.6A.

Operates on the full range of 2.8A to 6.6A on either 3 or 5 step IGBT, ferroresonant or thyristor CCRs that are designed in compliance with IEC or FAA requirements.

Fully dimmable lights, replicating the response curve of traditional halogen lights.

Full compatibility with existing airfield lighting series circuits. Installation on same mounting device as most conventional lights, for a straightforward replacement.


Monitoring function of the individual light arrays for open circuit, short circuit, and over temperature. The LED light automatically disconnects from the secondary side of the isolation transformer, resulting in an open circuit condition.

Low operating temperature, ensuring longer component life.

FAA style 3, ICAO style 4 fixture with a 4.0 mm profile above gradient

L-823 connectors

Integral surge protection

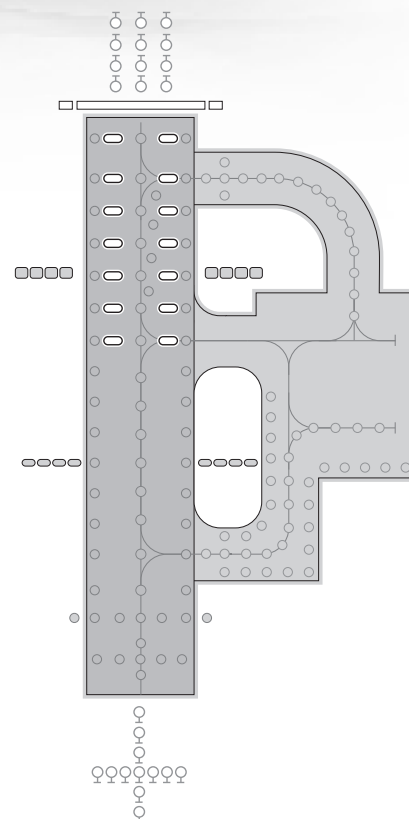

Environmental Conditions

► Ambient Temperature -55 °C to +55°C (-67 °F to +131°F)

► Storage Temperature -55°C to +70°C (-67 °F to +158°F)

► Atmospheric Altitude up to 10,000 feet (3000m)

► Relative Humidity 0-100% (sealed unit)

Standards	
EMC protection	Immunity IEC 61000-4 Emission IEC 61000-2
Ingress protection class dust/liquids	IP68 (IEC69598-1)
Vibration resistance	IEC60068-2-6

UK: +44 (0) 1942 68 5555 | USA: +1 (239) 985-9406

www.atgairports.com enquiries@atgairports.com sales-usa@atgairports.com

L-850B(L)

FX850B

LED Inset runway touch down zone
High intensity lighting solutions



Ordering Codes:

FX 850B8 5

Application

L-850B (L) Touch Down Zone

Beam Type

A Side

1 = Straight
3 = Toe in right
0 = Blank

B Side

1 = Straight
2 = Toe in left
0 = Blank

Colour

A Side

W = White
N = Not applicable

B Side

W = White
N = Not applicable





Specification

Refer to front cover

Connections

1 = 1 x Bi-pin plug

Beam Options



Additional optional features may be available upon request

UK: +44 (0) 1942 68 5555 | USA: +1 (239) 985-9406


www.atgairports.com enquiries@atgairports.com sales-usa@atgairports.com

L-850B(L)

FX850B

LED Inset runway touch down zone
High intensity lighting solutions

Dimensions

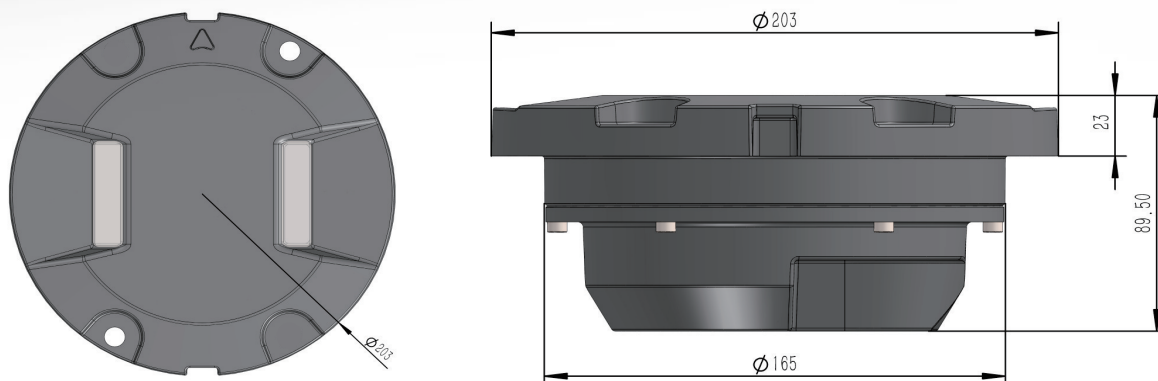

Packaging

- Net weight 2.5Kg
- Gross weight 2.9 (boxed)
- Box 220mm (L) x 220mm (W) x 225mm (H)

weights and dimensions are nominal



Head Office:

atg airports Ltd

Lowton Business Park | Newton Road

Lowton St. Mary's | Warrington

WA3 2AP | United Kingdom

atg airports reserve the right to change technical data and details at any point in time. Errors may have occurred



☎ UK: +44 (0) 1942 68 5555 | USA: +1 (239) 985-9406

🌐 www.atgairports.com ✉ enquiries@atgairports.com ✉ sales-usa@atgairports.com

Rev 3 - 2020

L-850B(L)